



Electrical performance:

CEI EN 50393 as applicable
(with testing under water head and water
between the cable cores)

Gel: UL 94-HB

Halogen free:

according to CEI EN 50267 2-2

**Self-extinguishing and
resistant to abnormal
heat and fire:**

heat and fire:

Glow wire test a +960°C
according to EN 60695-2-11

Operating
temperature **90°**

Gel operating temperature:
-60°C / +200°C




Ready Box IP68


The 4-entrances, gel pre-filled junction box
complete with connection block and glands,
for 5 core cables with diameter up to 16 mm.

- Ready to use, it can be installed in all environmental conditions
- Also suitable for wet or flooded environments
- Always re-enterable
- Pre-filled with gel. Non-toxic and non-classified as hazardous under CLP
- Pre-threaded entries for cable gland mounting
- Snap shut closure, does not require screws
- Wall or external ceiling fixing system
- Halogen free & UV resistant
- No shelf life


Ready, safe, quick & innovative

**Pre-filled with
non-toxic, safe gel.
Nothing to pour,
mix or cast!**

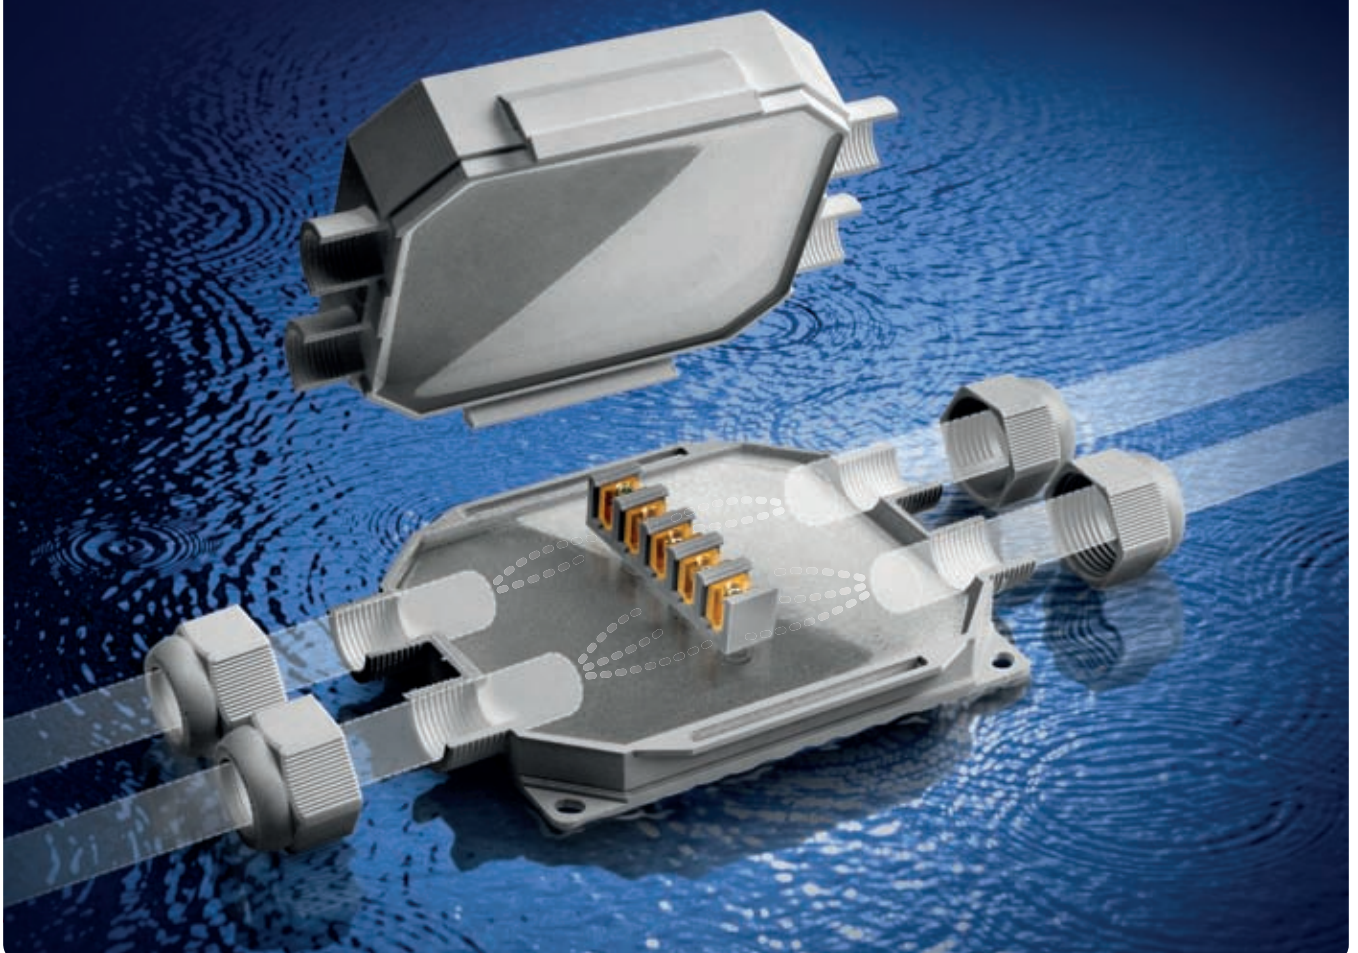


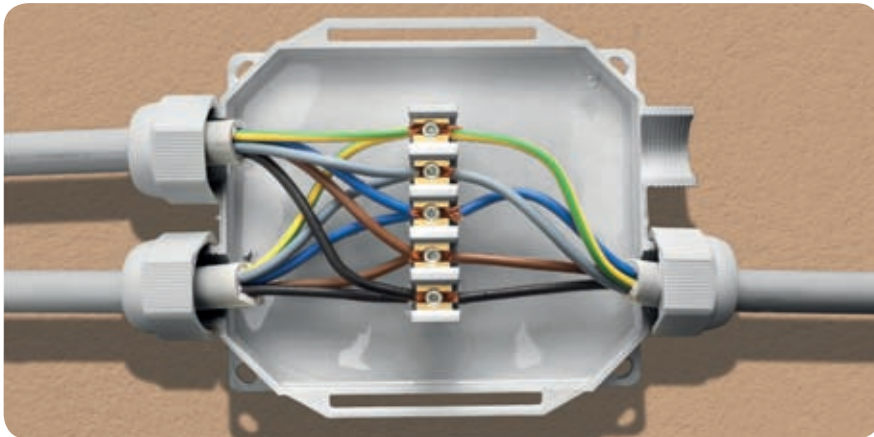

Thanks to its innovative design, unlike a standard box, there is no need to break through the walls of the box to insert the cable.

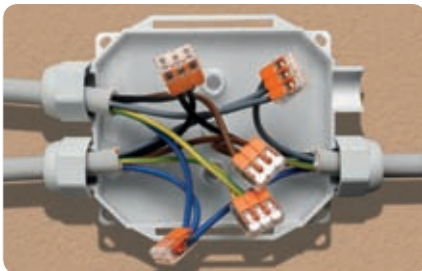

Also suitable for extra-flat lever connectors.

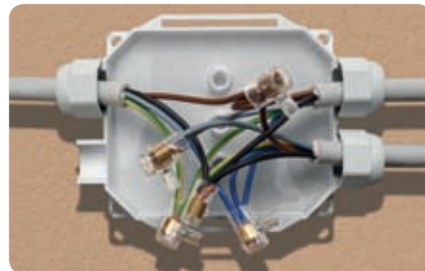


Also suitable for screw terminals.

Revolutionary!

No additional accessories are required as it is equipped with a five-core connection block and 4 glands M25 x 1,5

Insulated connection block for 5 core cables up to 6 mm²

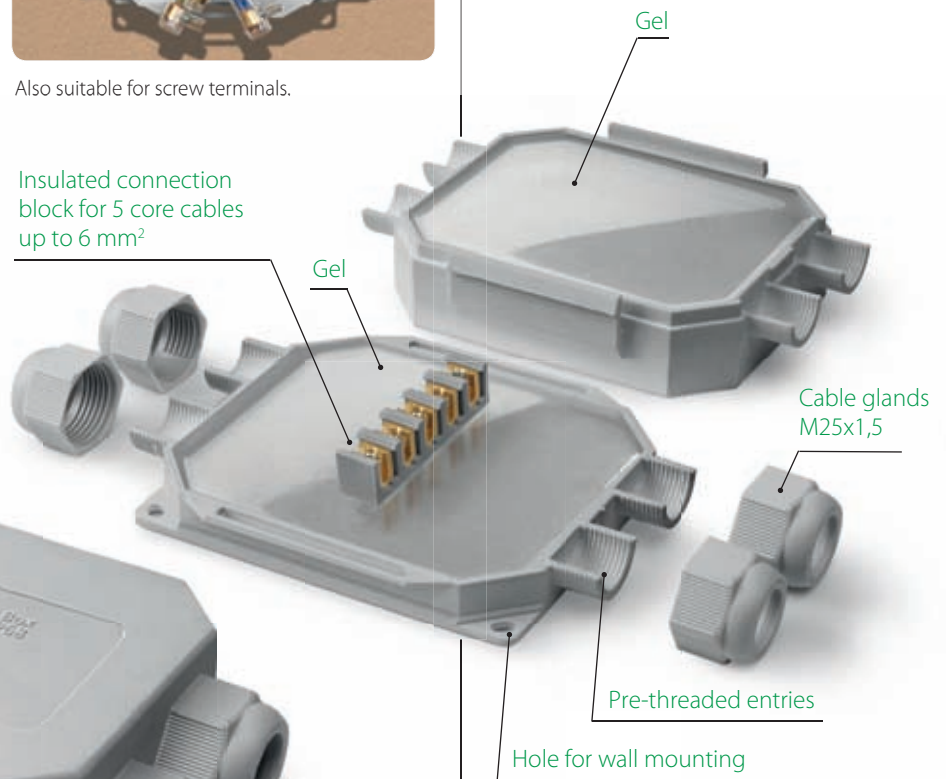

Screwless closure

| Product | n° of entrances | Ø entrances with cable glands | | (mm) |
|----------------|-----------------|-------------------------------|----------|----------------|
| | | min (mm) | max (mm) | |
| Ready Box IP68 | 4 | 10 | 16 | 120 x 100 x 50 |

